

Notes on safety

It is imperative to observe the following instructions when setting up, connecting and using the telephone.

- Place the charger cradle on a non-slip surface.
- Lay the connection cable so it cannot cause accidents!
- Only clean your telephone with a slightly moist cloth.
- Do not use the WPU-7800G in wet rooms (e.g. bathrooms).
- Protect your telephone from moisture, dust, aggressive liquids and gases.
- Only use approved accessories.
- Only use the plug-in power supply supplied.
- Always switch off the handset before removing the battery.

Do not place the handset or the charger cradle...

- Close to heat sources.
- In direct sunlight.
- Next to other electrical devices.

Never

- Open the charger cradle or the handset (except for the battery compartment cover) yourself!
- Touch the plug contacts with pointed metallic objects!
- Use the handset in any dangerous places such as in an area with explosive gas in the air.

Research has shown that in certain cases medical devices can be affected by switched-on portable telephones. When using portable telephones inside medical facilities, you must comply with the stipulations of the respective institute.

Information about the Li-ion Battery


- KEEP THE BATTERY CONTACTS AWAY FROM METAL OBJECTS.
- KEEP OUT OF REACH OF CHILDREN.
- DO NOT OPEN, INCINERATE, HIT OR DISASSEMBLE.
- CHARGE IN A LOCATION NO HOTTER THAN 45°C.
- REMOVE FROM THE DESKTOP HOLDER WHEN THE BATTERY CHARGING IS COMPLETED.
- DO NOT STORE THE BATTERY PACK ANYWHERE THAT THE TEMPERATURE GOES OVER 45°C.
- DO NOT LEAVE THE WPU-7800G WITH THE BATTERY PACK INSTALLED WHEN STORING FOR A LONG TERM.
- WHEN DISPOSING OF A USED BATTERY PACK CONSULT A LOCAL WASTE PROCESSING CONTRACTOR AND FOLLOW ALL LAWS CONCERNING DISPOSAL AND RECYCLING.
- DO NOT CHARGE THE BATTERY PACK WITH ANY METHOD OTHER THAN THAT SPECIFIED.

Symbols displayed on the screen

- Radio link quality (Six bars: good radio link – one bar: unreliable radio link)
- Ringer disabled, Vibrator enabled
- Battery charging status

- Out of call coverage
- Being connected to network
- An alarm is set
- Call trial or connection
- Call not available

Diagram

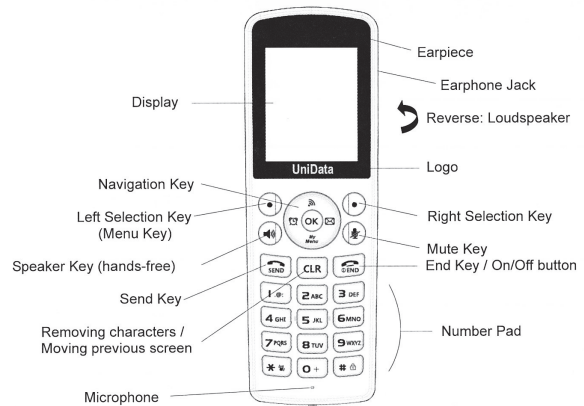

Button on the handset

- Soft keys (Selection) – the function of an individual button is depicted in the display depending on status. Options will appear.
- Confirmation (OK), Select, View, Connect on each display screen
- Navigation Key – In the idle state, this button opens each function. Within a menu or a list, you can use this as direction keys.
- CLR Key is used to return to previous menu list. Cancel (ESC) and removing characters.
- Search WLAN key / Scroll up in the menu list
- Equivalent to "Answer" on a standard phone and "hold" during a call.
- Quick access to personal shortcuts / Scroll down in the menu list
- Equivalent to "hang up" on a standard phone. Return to idle state. Pressing and holding the key in the idle state turns the handset On/Off

- Setting up alarm and wakeup call / Move to left in the menu and editor.
- Message function key
- Speakerphone key (Hands-free button) Switches the inbuilt loudspeaker on and off
- Mute key is used when calling on the phone. Pressing the key during a call turns "Mute" mode.
- Number key / Pressing and holding in the idle state turns to +
- Number keys are used for direct Entry of call numbers and names.
- Pressing and holding the key in the idle state switches the ringer (buzzer) On/Off
- The pound is for entering the pound sign. Pressing and holding the key in the idle state: Switches on the key lock.

Key Function

The following table gives an overview of the various key functions.

Key	Duration	... in status	Description
Left Softkey	Short	Standby	Call up the whole menu
		Lists	Call up the respective option menu
Right Softkey	Short	Standby	Retrieve the phonebook menu (Search)
		Lists	Return to previous menu
OK Softkey (OK)	Short	Menus, Lists	Confirmation (OK)
		View, Select, Connection	View, Select, Connection
Clear Key (CLR)	Short	Menus, Lists	Return to previous menu, list
		Editor	Cancel (Esc), Removing characters
Navigation Key	Short	Standby	Search Access point (WLAN search)
		Menus, Lists	Scroll up
Top		Connection	Increase volume
Navigation Key	Short	Standby	Shortcuts to get quick access
		Menus, Lists	Scroll down
Bottom		Connection	Reduce volume
Navigation Key	Short	Standby	Set up alarm and wakeup call
		Editor	Cursor back one character
Left	Long	Editor	Cursor to start of line
Navigation Key	Short	Standby	Message function
		Editor	Cursor forward one character
Right	Long	Editor	Cursor to end of line
Speaker Key (Hands-free)	Short	Connection	Switch open listening / hands-free operation on / off
Mute Key	Short	Connection	Switch mute operation on / off
Send Key (Pick-up), green	Short	Standby	Receive and make a call, Call history
		Connection	Hold a call
	Long		Make a call to the latest call
End Key (hang-up), red	Short	Standby	Return to standby status

Key	Duration	Incoming call	Reject call
		Connection	End connection
		Editor	Exit editor without changes
	Long	Every status	Switch off handset
		Handset switched off	Switch on handset
Number keys	Long	Standby	Switch +
		Standby	Enter number into predial
	Short	Editor	Character
	Long	Standby	Select the corresponding quick call destination (if quick call programmed)
Key	Short	Editor	Switch to +, *, _ in text edit
		Long	Standby
	Long	Standby	Switch buzz mode on / off (Permanent)
Key	Long	Standby	Key lock on / off (Enter Password)*

*Initial Password: 0000

Calls

- Answer a call: Press green Send key .
- Terminate a call: Press red End key .
- Internal call: Dial number and press green Send key .
- Making calls from lists (Directory / Phone book): Press Right key and find the registered number list.
- Navigation keys ▲ / ▼: Select an entry and press the green Send key .

During a call ...

Toggle between two subscribers

- Press the green Send Key .

Call transfer

- Attended Transfer:** Press green Send Key or press Left softkey and select 'Hold', using and Press key. And press dial. After answering, press Left softkey and select 'Transfer', using and press key.

- Blind Transfer:** Press green Send key or press Left softkey and select 'Hold', using and Press key. Enter dial and press Left softkey , select 'Transfer' and press key.

Answering a call during a conversation (Call waiting)

- Press green Send key during conversation, and answer incoming call. During a call, automatically the other is on hold status.

Speaker Phone (Hands-free) / Mute

- Press Speaker key during a call (on / off) / Press Mute key during a call (on / off).